


Galvanizing Processes

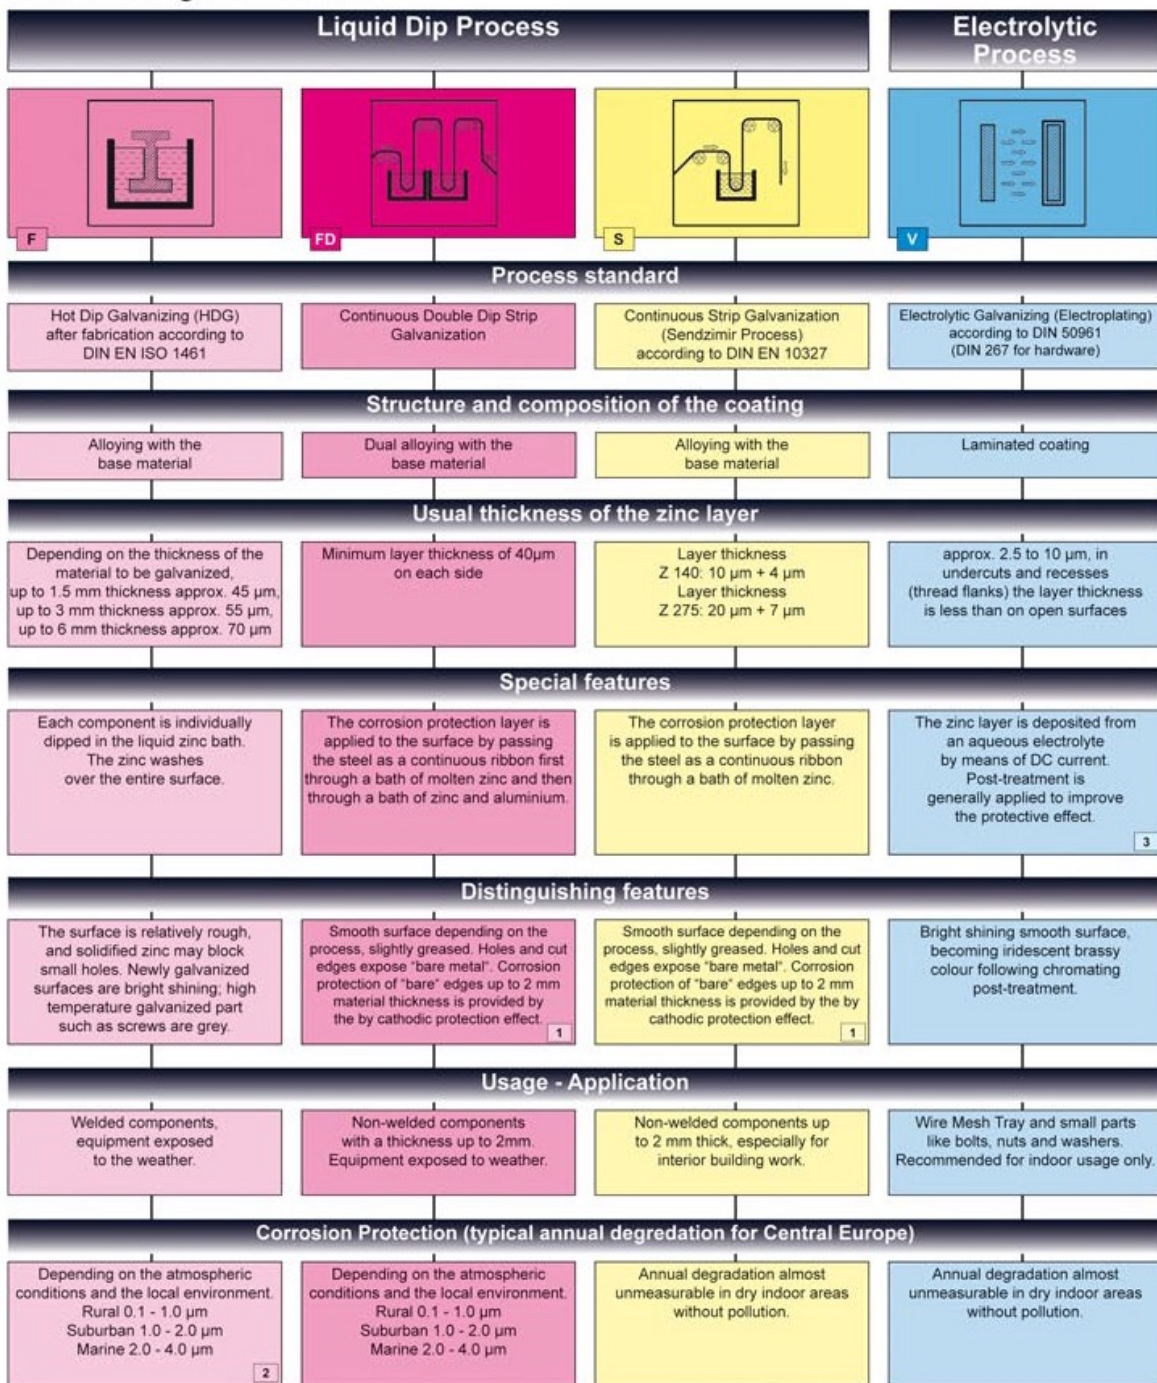

1 Components over 2 mm in material thickness are hot dip galvanized at NIEDAX

2 Local environmental conditions would be for instance the direct corrosive effect of a chimney with CO₂ flue gases.

3 Chromating process is ROHS compliant.